



アクセサリー カタログ



テフロンコーティングアルミニウム 4Port マニホールド

SPECIFICATIONS:

- #30 Thread at Inlet and Outlet for Direct Connection to Other URG Components
- 10.75" Length and 12.25" Length Available
- Includes Mounting Bolts
- 2.75" Center to Center Spacing at Outlet Ports




URG-2000-30HD

テフロンコーティングアルミニウム 2Port マニホールド

SPECIFICATIONS:

- #30 Thread at Outlet for Direct Connection to Other URG Components
- Available with 3 Inlet Options
- ☐ 1.25" Length #30 Male Thread
- ☐ 4.5" Length #30 Male Thread
- ☐ 1.246" OD at Inlet
- 3.125" Center to Center Spacing at Outlet Ports
- .9 lbs. (with 1.25" Length Outlet)



URG-2000-30HE

テフロンコーティングアルミニウム 5Port マニホールド

SPECIFICATIONS:

- #30 Thread at Outlet
- Available Teflon® Coated or Anodized
- Available with 1.246" OD or #30 Female Thread at Inlet
- 6 1/4" Largest OD
- 2.4 lbs.



URG-2000-30HF

グラスサンプリングマニホールド



URG-2000-30HG4

SPECIFICATIONS:

- Pyrex® Glass
- Available with 2, 3, 4, 6 or 8 Sample Ports

FEATURES:

- Distribution Manifold for Multiple Gas Analyzers
- Small Volume Keeps Residence Time Short
- Available with Either 1/4", 3/8" or 1/2" Inlet, Outlet and Sample Ports

ORDERING INFORMATION:

- **URG-2000-30HP2** Manifold with 3/8" OD Inlet and Outlet and (2) 1/4" OD Sample Ports
- **URG-2000-30HP3** Manifold with 3/8" OD Inlet and Outlet and (3) 1/4" OD Sample Ports
- **URG-2000-30HP6** Manifold with 3/8" OD Inlet and Outlet and (6) 1/4" OD Sample Ports
- **URG-2000-30HG4** Manifold with 3/8" OD Inlet and Outlet and (4) 3/8" OD Sample Ports
- **URG-2000-30HG8** Manifold with 3/8" OD Inlet and Outlet and (8) 3/8" OD Sample Ports
- **URG-2000-30HH4** Manifold with 1/2" OD Inlet and Outlet and (4) 1/4" OD Sample Ports
- **URG-2000-30HH6** Manifold with 1/2" OD Inlet and Outlet and (6) 1/4" OD Sample Ports



URG-2000-30HG8

#30PUFサンプラー

SPECIFICATIONS:

- Available as Glass or Teflon® Coated Aluminum
- 28mm OD x 137mm Length - Glass (*URG-2000-30PUF-1*)
- 28.5mm OD x 100mm Length - Teflon® Coated Aluminum (*URG-2000-30-PUF-2*)
- .12 lbs. (*Glass*)
- .13 lbs. (*Teflon® Coated Aluminum*)

FEATURES:

- For Collecting SVOC's and PAH's
- #30 Thread on Both Ends for Direct Connection to Filter Packs and Other URG Components
- Includes Teflon® Lined Protective End Caps
- Internal Ridge at Outlet Side to Prevent PUF Material from Moving During Sampling



URG-2000-30PUF-1

#64PUFサンプラー

SPECIFICATIONS:

- Glass PUF Sampler
- 64mm OD x 127mm Length
- .41lbs.

FEATURES:

- For Collecting SVOC's and PAH's
- Designed to Meet USEPA Compendium Methods TO4, TO9, and TO13
- Replacement PUF Sampler for Thermo and Tisch Instruments
- Includes Stainless Steel Support Screen to Prevent PUF Material from Moving During Sampling
- Aluminum Transport and Storage Container Available
- End Caps Also Available in Delrin (*URG-2000-64SSD*)



URG-2000-64SSB
Aluminum Transport
and Storage Container

URG-2000-64SS

#30 テフロンアダプター



SPECIFICATIONS:


- Teflon® Adapter
- Adapter Available with #30 Female Thread or #30 Male Thread
- .16 lbs.

FEATURES:

- Allows URG Components to Adapt to Other Sampling Equipment
- Available with 1/4", 3/8" or 1/2" FNPT
- Threads Directly to All URG Components with #30 Thread

ORDERING INFORMATION:

- **URG-2000-30AE** #30 Female Thread with Quick Release
- **URG-2000-30AE-1** #30 Male Thread with Quick Release
- **URG-2000-30AE-2** #30 Female Thread with 1/4" FNPT
- **URG-2000-30AE-12** #30 Male Thread with 1/4" FNPT
- **URG-2000-30AE-7** #30 Female Thread with 3/8" FNPT
- **URG-2000-30AE-9** #30 Male Thread with 3/8" FNPT
- **URG-2000-30AE-6** #30 Female Thread with 1/2" FNPT
- **URG-2000-30AE-10** #30 Male Thread with 1/2" FNPT

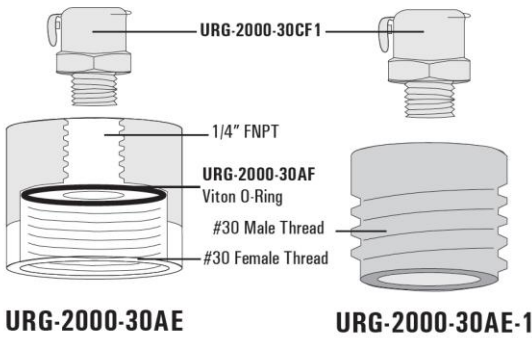

Quick Connect Tubing Fittings

URG-2000-CF2 Chrome Fitting for 1/4" ID Tubing	URG-2000-CF3 Chrome Fitting for 1/4" ID Tubing	URG-2000-CF4 Chrome Fitting 3/8" ID Tubing	URG-2000-CF5 90 Degree Chrome Fitting for 1/4" ID Tubing	URG-2000-CF6 90 Degree Chrome Fitting for 3/8" ID Tubing
URG-2000-CF7 90 Degree Chrome Fitting for 1/4" ID Tubing	URG-2000-CF8 Chrome Fitting for 1/6" ID Tubing	URG-2000-TF2 Thermoplastic Fitting for 1/4" ID Tubing	URG-2000-TF3 Thermoplastic Fitting for 3/8" ID Tubing	URG-2000-TF5 90 Degree Thermoplastic Fitting for 1/4" ID Tubing
				URG-2000-TF6 90 Degree Thermoplastic Fitting for 3/8" ID Tubing

保護用エンドキャップ

SPECIFICATIONS:

- Polyethylene End Cap
- Protection Cap Used for #30 Male Thread
- Also Available in Teflon® (*URG-2000-30ENDT*)
- Used When Storing, Coating and Extracting Annular Denuders



URG-2000-30END

SPECIFICATIONS:

- Teflon® Lined End Cap
- Protection Cap Used for #30 Male Thread
- Supplied with All Manifolds and Can Be Used to Cap Unused Manifold Ports



URG-2000-30ENDA

SPECIFICATIONS:

- Thermoplastic Bored Cap
- Used with Teflon® Clad Silicone Seal Rings
- Used with Seal Ring and Glass Insert as Desorption Coupler for Quartz Mercury Denuders



URG-2000-30BR

SPECIFICATIONS:

- Dustplug for Quick Release Fitting
- Dustcap for Cyclone Inlet Arms and Other Components That Cannot Be Sealed with a Threaded Cap



URG-2000-DUSTCAP



URG-2000-DUSTPLUG



URG-2000-30BC2

SPECIFICATIONS:

- Delrin Coupler with Attached Teflon® Seal Ring
- Used to Connect #30 Male Threads Together
- 51mm OD
- .14 lbs.



URG-2000-30HDB

SPECIFICATIONS:

- Polyethylene Coupler with Viton O-Ring Face Seal
- Used to Connect #30 Male Threads Together
- 44.6mm OD
- .08 lbs.



URG-2000-30HDCA

SPECIFICATIONS:

- Teflon® Coated Aluminum Compression Coupler
- 1.25" ID on Both Sides with O-Rings
- 41.25mm OD
- .2 lbs.



URG-2000-30AA

SPECIFICATIONS:

- Delrin Coupler
- Used to Connect #30 Male Threads Together
- Requires Separate Teflon® Seal Ring (*URG-2000-30x23x3T*)
- 47mm OD
- .07 lbs.


ゲースネックアダプター

SPECIFICATIONS:

- Teflon® Coated Aluminum
- 5/8" OD or 7/8" OD Tube
- 15" Length or 27" Length
- Designed to Be Used with a Cyclone to Replace PM-10 Inlet
- Available with #30 Male Thread or #30 Female Thread on Top
- Available with 1.25" ID, #30 Male Thread or #30 Female Thread on Bottom
- Additional Configurations and Lengths Available
- .58 lbs.



URG-2000-30EH-1A

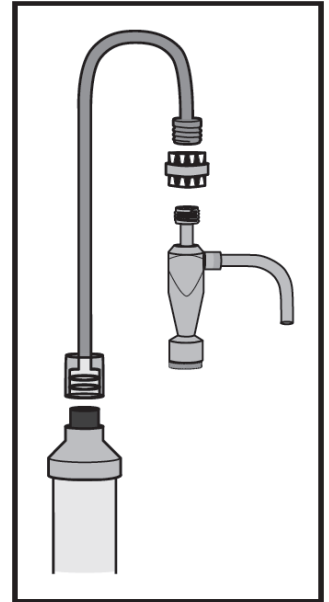

Possible Configuration

#30 フロー ストレートナ

SPECIFICATIONS:

- Teflon® Coated Aluminum
- #30 Male Thread on Both Ends
- 100mm Length
- .13 lbs.



URG-2000-30WM

アルミニウムアダプター

SPECIFICATIONS:

- Teflon® Coated Aluminum with Teflon® Coated 1/2" OD Stainless Steel Stub
- Threads Directly onto any URG Component with #30 Male Thread
- Also Available with 1/4" OD Stainless Steel Stub (URG-2000-30AJ-1)
- .21 lbs.



URG-2000-30AJ-2
Adapter with 1/2" OD
Stainless Steel Stub

キャリングケース



URG-2000-30LB

SPECIFICATIONS:


- Made of Rugged Plastic and Insulated with Polyurethane Foam
- Dent and Rust Resistant
- 26" x 17" x 6"
- 17 lbs. (without components)

FEATURES:


- Customized Foam Interior to Hold Components in Place During Transportation
- No Additional Packing Material Required to Keep Components Safe During Shipping
- Many Internal Configurations Available

ORDERING INFORMATION:

- **URG-2000-30LB** Holds (5) Quartz Annular Denuders, (3) 47mm Filter Packs and (3) Coupler Impactor/Elutriator Assemblies
- **URG-2000-30LC** Holds (5) Quartz Annular Denuders and (2) Quartz Particulate Traps (Tekran #1135)
- **URG-2000-30LD** Holds (10) 242mm Length Annular Denuders and (10) 47mm Filter Packs

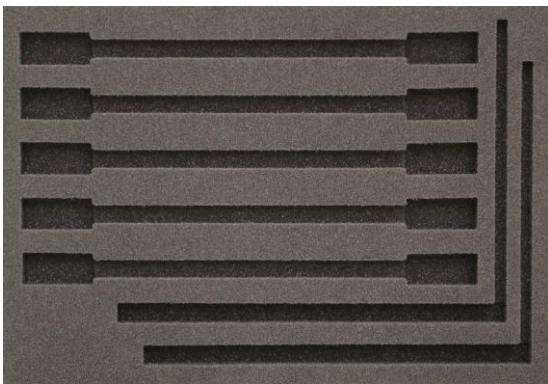

URG-2000-30LC

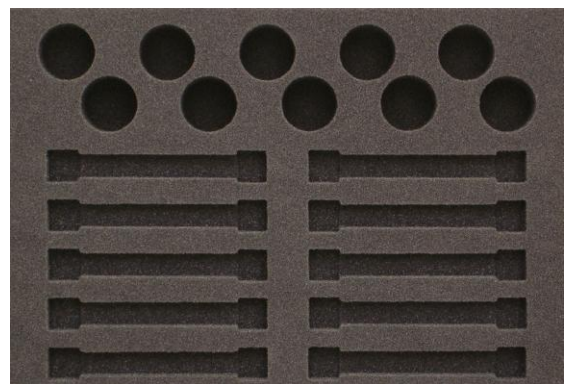

URG-2000-30LD

ドライガスメーター

SPECIFICATIONS:

- Maximum Flow 42Lpm
- Minimum Flow 0.26Lpm
- Maximum Working Pressure 0.5 bar
- 7 1/2" x 7 1/2" x 5"
- 2 lbs.

FEATURES:

- Displays Flow in Liters
- Mechanically Counts Liters That Have Flowed Through the System
- Attaches to Either Side of a Sampling Pump
- Includes All Tubing and Quick Connect Fittings Required for Attaching to URG Sampling Systems

